



Used inside or out, the perfect natural stone finish for any window is **Caithness flagstone sills**.


Strength and durability ensures they can withstand both the outdoor elements as well as the hustle and bustle inside the home whilst a wide range of finishes, bespoke sizes and features provides customers with the opportunity to personalise our sills to their requirements.




Riven Finish



Brushed Riven Finish



Antique Finish



Matt Polished Finish



High Polished Finish

Features & Benefits

Low Carbon Footprint - From extracting the stone to hand finishing the end product, all processes are handled on site.

High Performance - Renowned worldwide for its natural durability properties.

Wide Range of Uses - High flexural and compressive strength.

Versatile Appearance - Available in a variety of colours, finishes and sizes.



Technical Data

Summary of Typical Values

Density	2650 (kg/m ³)	BSEN 1936: 2006
Flexural Strength	35 Mpa	BSEN 12372:2006
Compressive Strength	209 Mpa	BSEN 1926: 2006
Water Absorption	0.20%	BSEN 13755:2008




Our stones versatile, strong and durable nature ensures our products can be seamlessly incorporated into both interior and exterior design projects. Additional features provide both practical and aesthetic value.

Sill Design Features


Summary of Typical Design Elements



Flat shape. Used mainly for interior but can be used for exterior as well.





Profiled shape. Used for exterior.




Sill drips. Used for exterior.



Cut outs. Used for both interior and exterior.

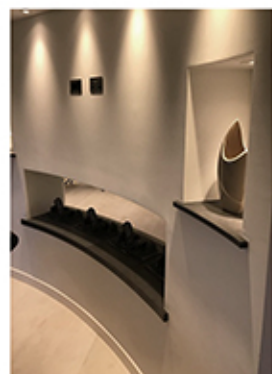

The information contained herein is to the best of our knowledge true and accurate and is given in good faith but without warranty. As part of our continual improvement process, Norse Stone Ltd reserve the right to change the properties listed on this data sheet without any prior notice.

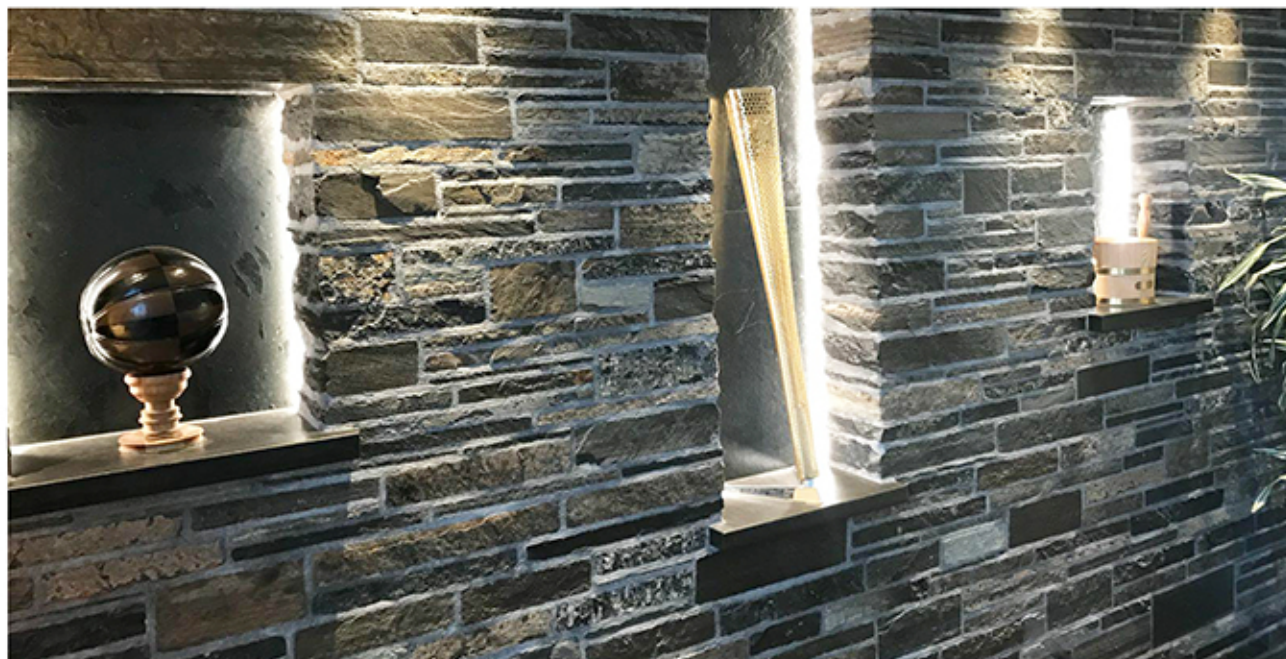

Whilst every effort has been made to ensure that your Caithness flagstone sills are of the highest quality, it will look better and last longer if a few simple maintenance procedures are adopted.

Usage

Caithness flagstone sills are intended to be used for either internal or external projects as specified by the project designer or builder.

Routine Maintenance

Annual visual inspections should be performed to check for cracks and movement.

Due to being made from a durable natural stone, our coping stone doesn't usually require any cleaning. In the event cleaning is required, use warm water with a mild detergent or dish soap along with a soft bristled brush.

Never use harsh chemicals or high-pressure sprayers or hoses.

After installation, internal sills can be sealed using 1No. coat of natural stone sealer. Repeat as required. Get in touch for recommendations.

