




Residential kitchens, bathrooms and hallways or high traffic commercial buildings, choose **Caithness flagstone flooring**.

An indigenous stone possessing high natural strength and durability combined with stunning finishes to create an eye-catching feature that lasts for years. Norse Stone offers an extensive range of designs and sizes produced using stone from our own quarries to create the ideal natural stone flooring solution.



### Features & Benefits

**Low Carbon Footprint** - From extracting the stone to hand finishing the end product, all processes are handled on site.

**High Performance** - Renowned worldwide for its natural durability properties.

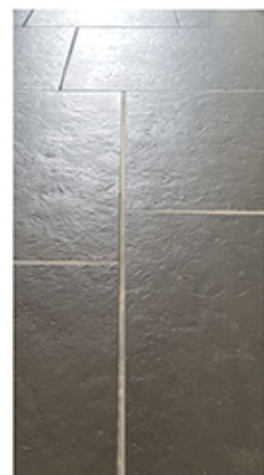
**Wide Range of Uses** - High flexural and compressive strength.

**Versatile Appearance** - Available in a variety of colours, finishes, layouts and sizes.



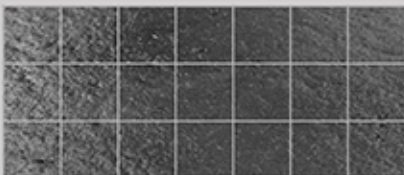
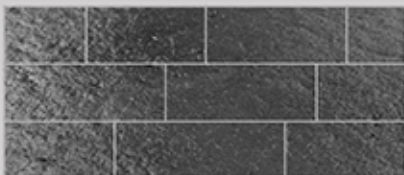


A durable natural stone, Caitness flagstone is perfectly suited for internal use in high traffic areas within both residential and commercial projects.

|  |                                     |                           |                  |
|--|-------------------------------------|---------------------------|------------------|
| <b>Technical Data</b><br>Summary of Typical Values | Density                             | 2650 (kg/m <sup>3</sup> ) | BSEN 1936: 2006  |
|  | Slip Resistance<br>(Brushed Finish) | 82.0 (dry)                | BSEN 14231: 2003 |
|  |                                     | 46.0 (wet)                | BSEN 14231: 2003 |
|  | Slip Resistance<br>(Antique Finish) | 78.0 (dry)                | BSEN 14231: 2003 |
|  |                                     | * 32.0 (wet)              | BSEN 14231: 2003 |
|  | Porosity                            | 0.40%                     | BSEN 1936: 2006  |
|  | Flexural Strength                   | 35 Mpa                    | BSEN 12372: 2006 |
|  | Compressive Strength                | 209 Mpa                   | BSEN 1926: 2006  |
|  | Water Absorption                    | 0.20%                     | BSEN 13755: 2008 |



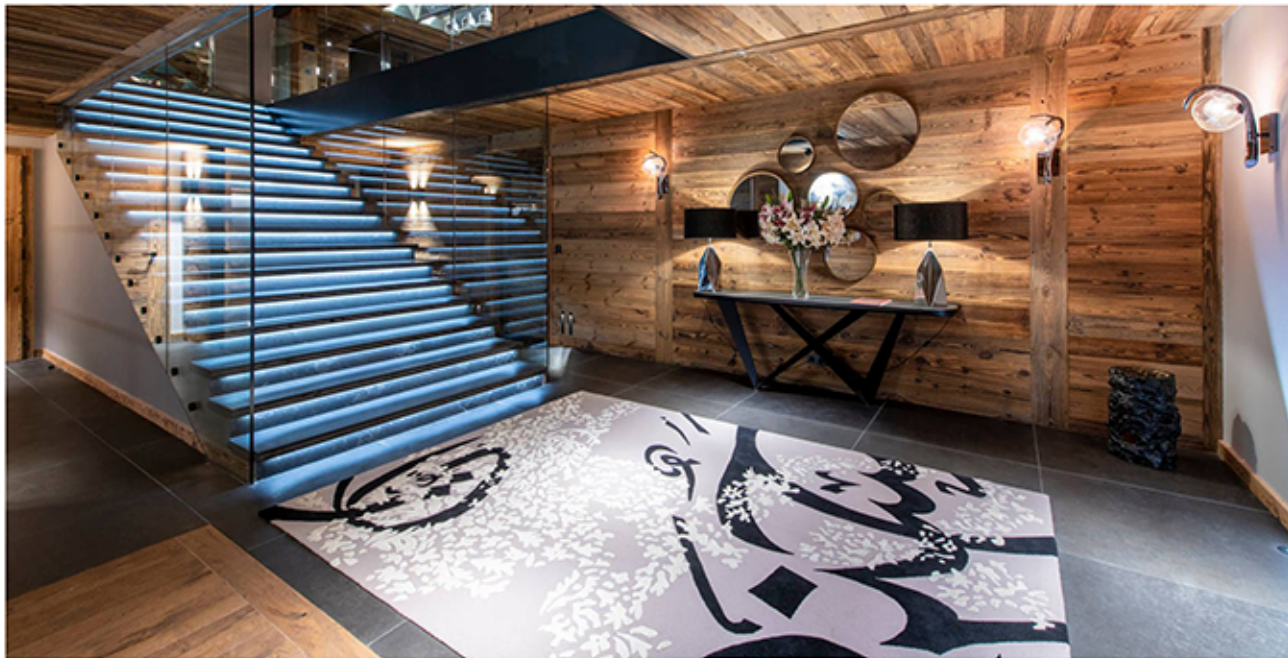
\*Note: Due to lower slip resistance, Antique finish is not suitable for walking on when wet

As with all Norse Stone products, our flooring is bespoke made to clients individual requirements ensuring the flooring complements the space and environment. With a selection of floor tile sizes, finishes and layouts available, clients can create a truly one-of-a-kind feature.

|   |   |  |
|---|---|--|
| <b>Flooring Design</b><br>Summary of Typical Flooring Layouts |    |  |
|   | Square  |  |
|   |  |  |
|   | Random  |  |
|   |    |  |
|   | Traditional   |  |
|   |  |  |
|   | Herringbone   |  |

The information contained herein is to the best of our knowledge true and accurate and is given in good faith but without warranty. As part of our continual improvement process, Norse Stone Ltd reserve the right to change the properties listed on this data sheet without any prior notice.





Whilst every effort has been made to ensure that your Caithness flagstone flooring is of the highest quality, it will look better and last longer if a few simple maintenance procedures are adopted.

## Usage

Caithness flagstone flooring is intended to be used for internal projects which can range from low impact residential areas to high traffic commercial projects as specified by the designer. Any abnormal traffic may result in the requirement of additional protection.

## Routine Maintenance

After being laid and allowing time for the laying material and grout to fully cure, seal the flooring with 2No. coats of natural stone sealer followed by 2No. coats of natural stone enhancer. Repeat after a month and then again after a year. Repeat as required. Get in touch for recommendations.

Flooring surfaces can be washed to remove dirt etc. providing care is taken not to use excessive pressure. For more extensive washing, contact a specialist cleaning contractor.

